



Greenfield/Cypress II GSR2 Deluxe Cheat Sheet

The Greenfield and Cypress II GSR2 Deluxe have several features and characteristics that require special attention during installation and set-up. These units use the GreenSmart 2 system. Refer to the owner's manual for full details.

Log Set Options (MUST BE ORDERED SEPARATELY)

The Greenfield and Cypress GSR2 Deluxe Stoves now offer the choice of two log sets (Oak and Birch)

Birch sku# 94500522	Oak sku# 94500521
	



GreenSmart™ 2 Deluxe

This stove now includes the blower and GreenSmart 2 remote standard.

LP (Propane) Conversion

BURNER AIR DEFLECTOR

When using LP (propane), make sure to use the included LP air deflector. Refer to the owner's manual for further details on LP conversion

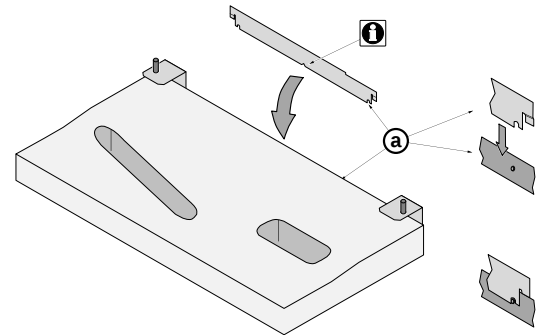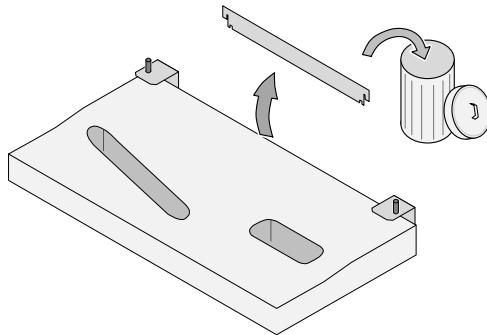

LP UNITS REQUIRE GSR STEPPER MOTOR (94400999)

When using LP (propane), make sure to order the GSR stepper motor (4-pack = 94400999, single = 250-01463).



RESTRICTOR ADJUSTMENT REQUIRED

This heater will not operate properly if the vent restrictor is not set for your specific installation. See "Vent configuration" section in the owner's installation manual.

FIRST FIRE OR START UP

Your appliance has been finished with the highest quality paint. Though this paint dries quickly to the touch, it does not cure or become hard until heated up by the appliance during first fire. For this reason, the stove will emit light smoke and have a slight odor. Consult your owner's manual for the complete paint curing instructions. Partially open doors or windows to minimize smoke & odor.

WARNING:

Sheet metal edges can be sharp

ADVERTENCIA:

Los bordes de chapa metálica pueden estar afilados

WARNING:

Failure to install this appliance per the manufacturer's instructions or failure to use only parts specifically approved with this appliance may result in property damage or personal injury.

CAUTION: RESTRICTOR ADJUSTMENT REQUIRED

This heater will not operate properly if the vent restrictor is not set for your specific installation. See "Vent configuration" section in the owner's installation manual.

BURNER ASSEMBLY IS VERY FRAGILE

Ceramic burner (if so equipped) must be handled by bottom pan only. Touch the fiber portion of the burner as little as possible. Damage due to improper handling will not be covered by warranty.

FIRST FIRE OR START UP

Your appliance has been finished with the highest quality paint. Though this paint dries quickly to the touch, it does not cure or become hard until heated up by the appliance during first fire. For this reason the stove will emit light smoke and have a slight odor. Consult your owner's manual for the complete paint curing instructions. Partially open doors or windows to minimize smoke & odor.

ADVERTENCIA:

El fracaso para instalar este aparato por las instrucciones del fabricante o el fracaso para utilizar sólo partes aprobaron específicamente con este aparato puede tener como resultado daño de propiedad o herida personal.

LA PRECAUCIÓN: EL AJUSTE DE RESTRICTOR REQUERIDO

Este calentador no funcionará apropiadamente si el restrictor de abertura no está previsto para su instalación específica. See "La configuración de abertura" corte transversal en el manual de instalación del propietario.

LA ASAMBLEA DEL QUEMADOR ES MUY FRAGIL

El quemador cerámico (si ése es el caso equipó) debe ser manejado por cacerola de fondo sólo. Toque la porción de fibra del quemador lo menos posible. Daño debido al manejo impropio no será cubierto por garantía.

EL PRIMERO FUEGO O COMIENZA PARA ARRIBAS

Su aparato ha estado terminado con la pintura de mejor calidad. Aunque esta pintura se seca rápidamente al tacto, no hace la cura o becomve duro until calienta por el aparato durante el primer fuego. Para esta razón la cocina emitirá humo ligero y tendrá un olor leve. Consulte el manual de su propietario para la pintura completa curar las instrucciones. Abra puertas o ventanas parcialmente para minimizar humo & olor.