

MINIMUM CLEARANCES
TO COMBUSTIBLE WALLS

Stove clearances measured from top of stove. Connector clearances measured from exhaust vent.

FLOOR PROTECTION


The pellet stove must be installed on a non-combustible surface protector extending the full width and depth of the heater and extending 6" (153mm) in front and 2" (51mm) to each side and under the rear exhaust Tee. Hearth protection must be a minimum .018" thick (26 gauge).

ALCOVE REQUIREMENTS


When installed in an alcove with a ceiling height less than 7 ft (2.134 M).

- Minimum Height is 60" with 6" side and 3" rear clearance to wall.
- Minimum Width is 40-1/4" with min. clearance of 3" for horizontal venting.
- Maximum depth is 48" with minimum clearance of 2" from pipe for vertical venting.


STOVE DIMENSIONS

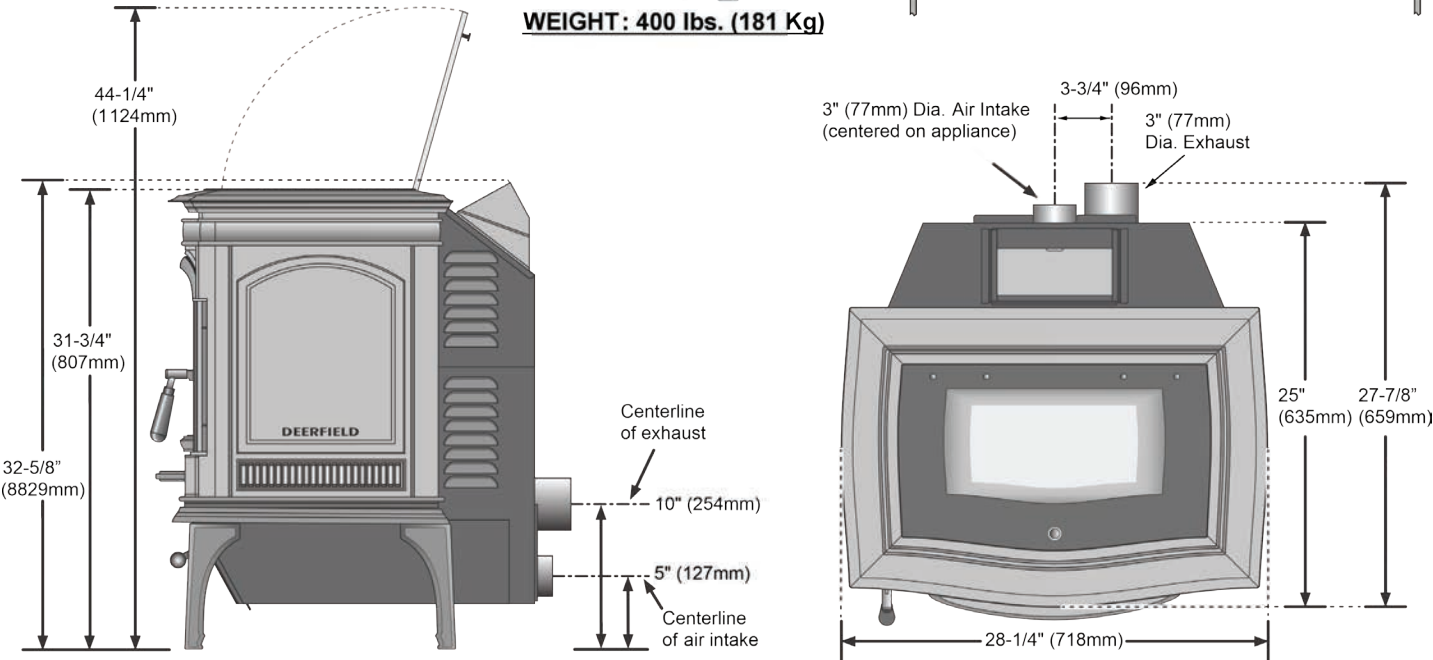


Straight Installations
Through the Wall Installation

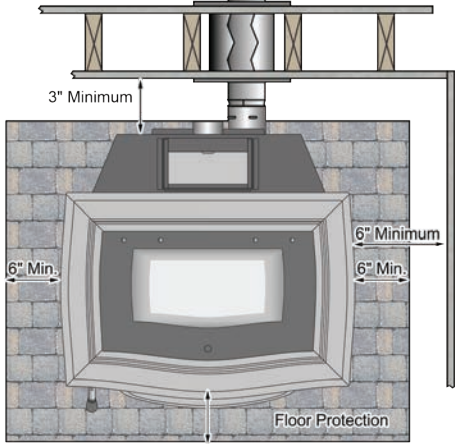


Interior Vertical Vents

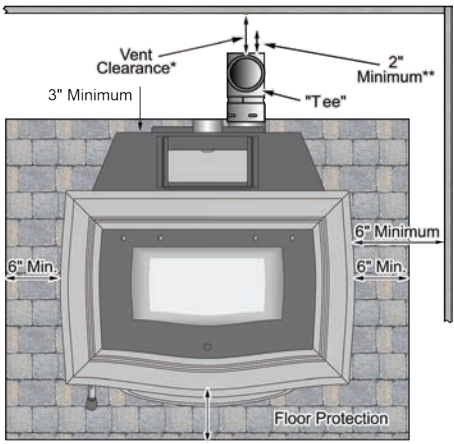

Corner Installations
Through the Wall Installation

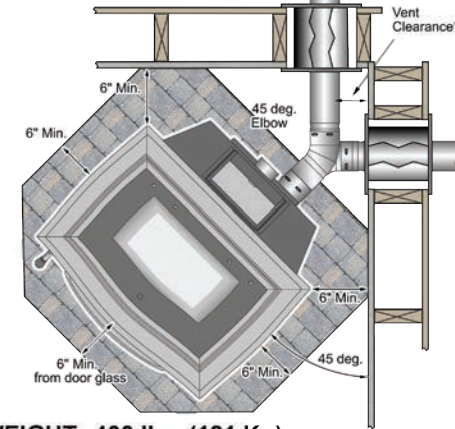

Interior Vertical Vents

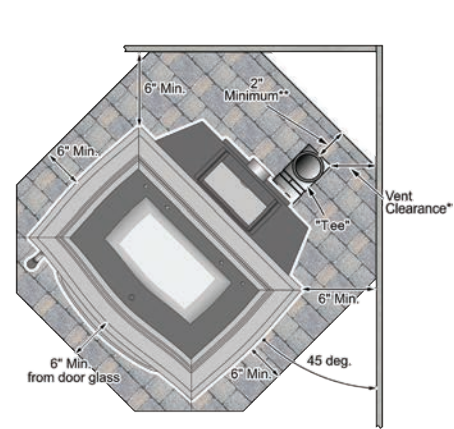


YOUR LOPI AUTHORIZED DEALER:



www.lopistoves.com
Manufactured in
Mukilteo, WA

Travis pellet burning stoves and inserts are protected by the following patents; U.S. 9528707 as well as other U.S. and Foreign Patents Pending Travis Industries reserves the right to alter or improve its products at any time without notification. Photos shown are for illustrative purposes only. The colors shown in the brochure are as accurate as possible, however some natural materials may vary due to the nature of the products. All trademarks belong to Travis Industries. For installation specifications refer to the Owner's Manual found on the Lopi website. ©2025/10 Printed in U.S.A. #98800814

DEERFIELD™ II
PELLET STOVE


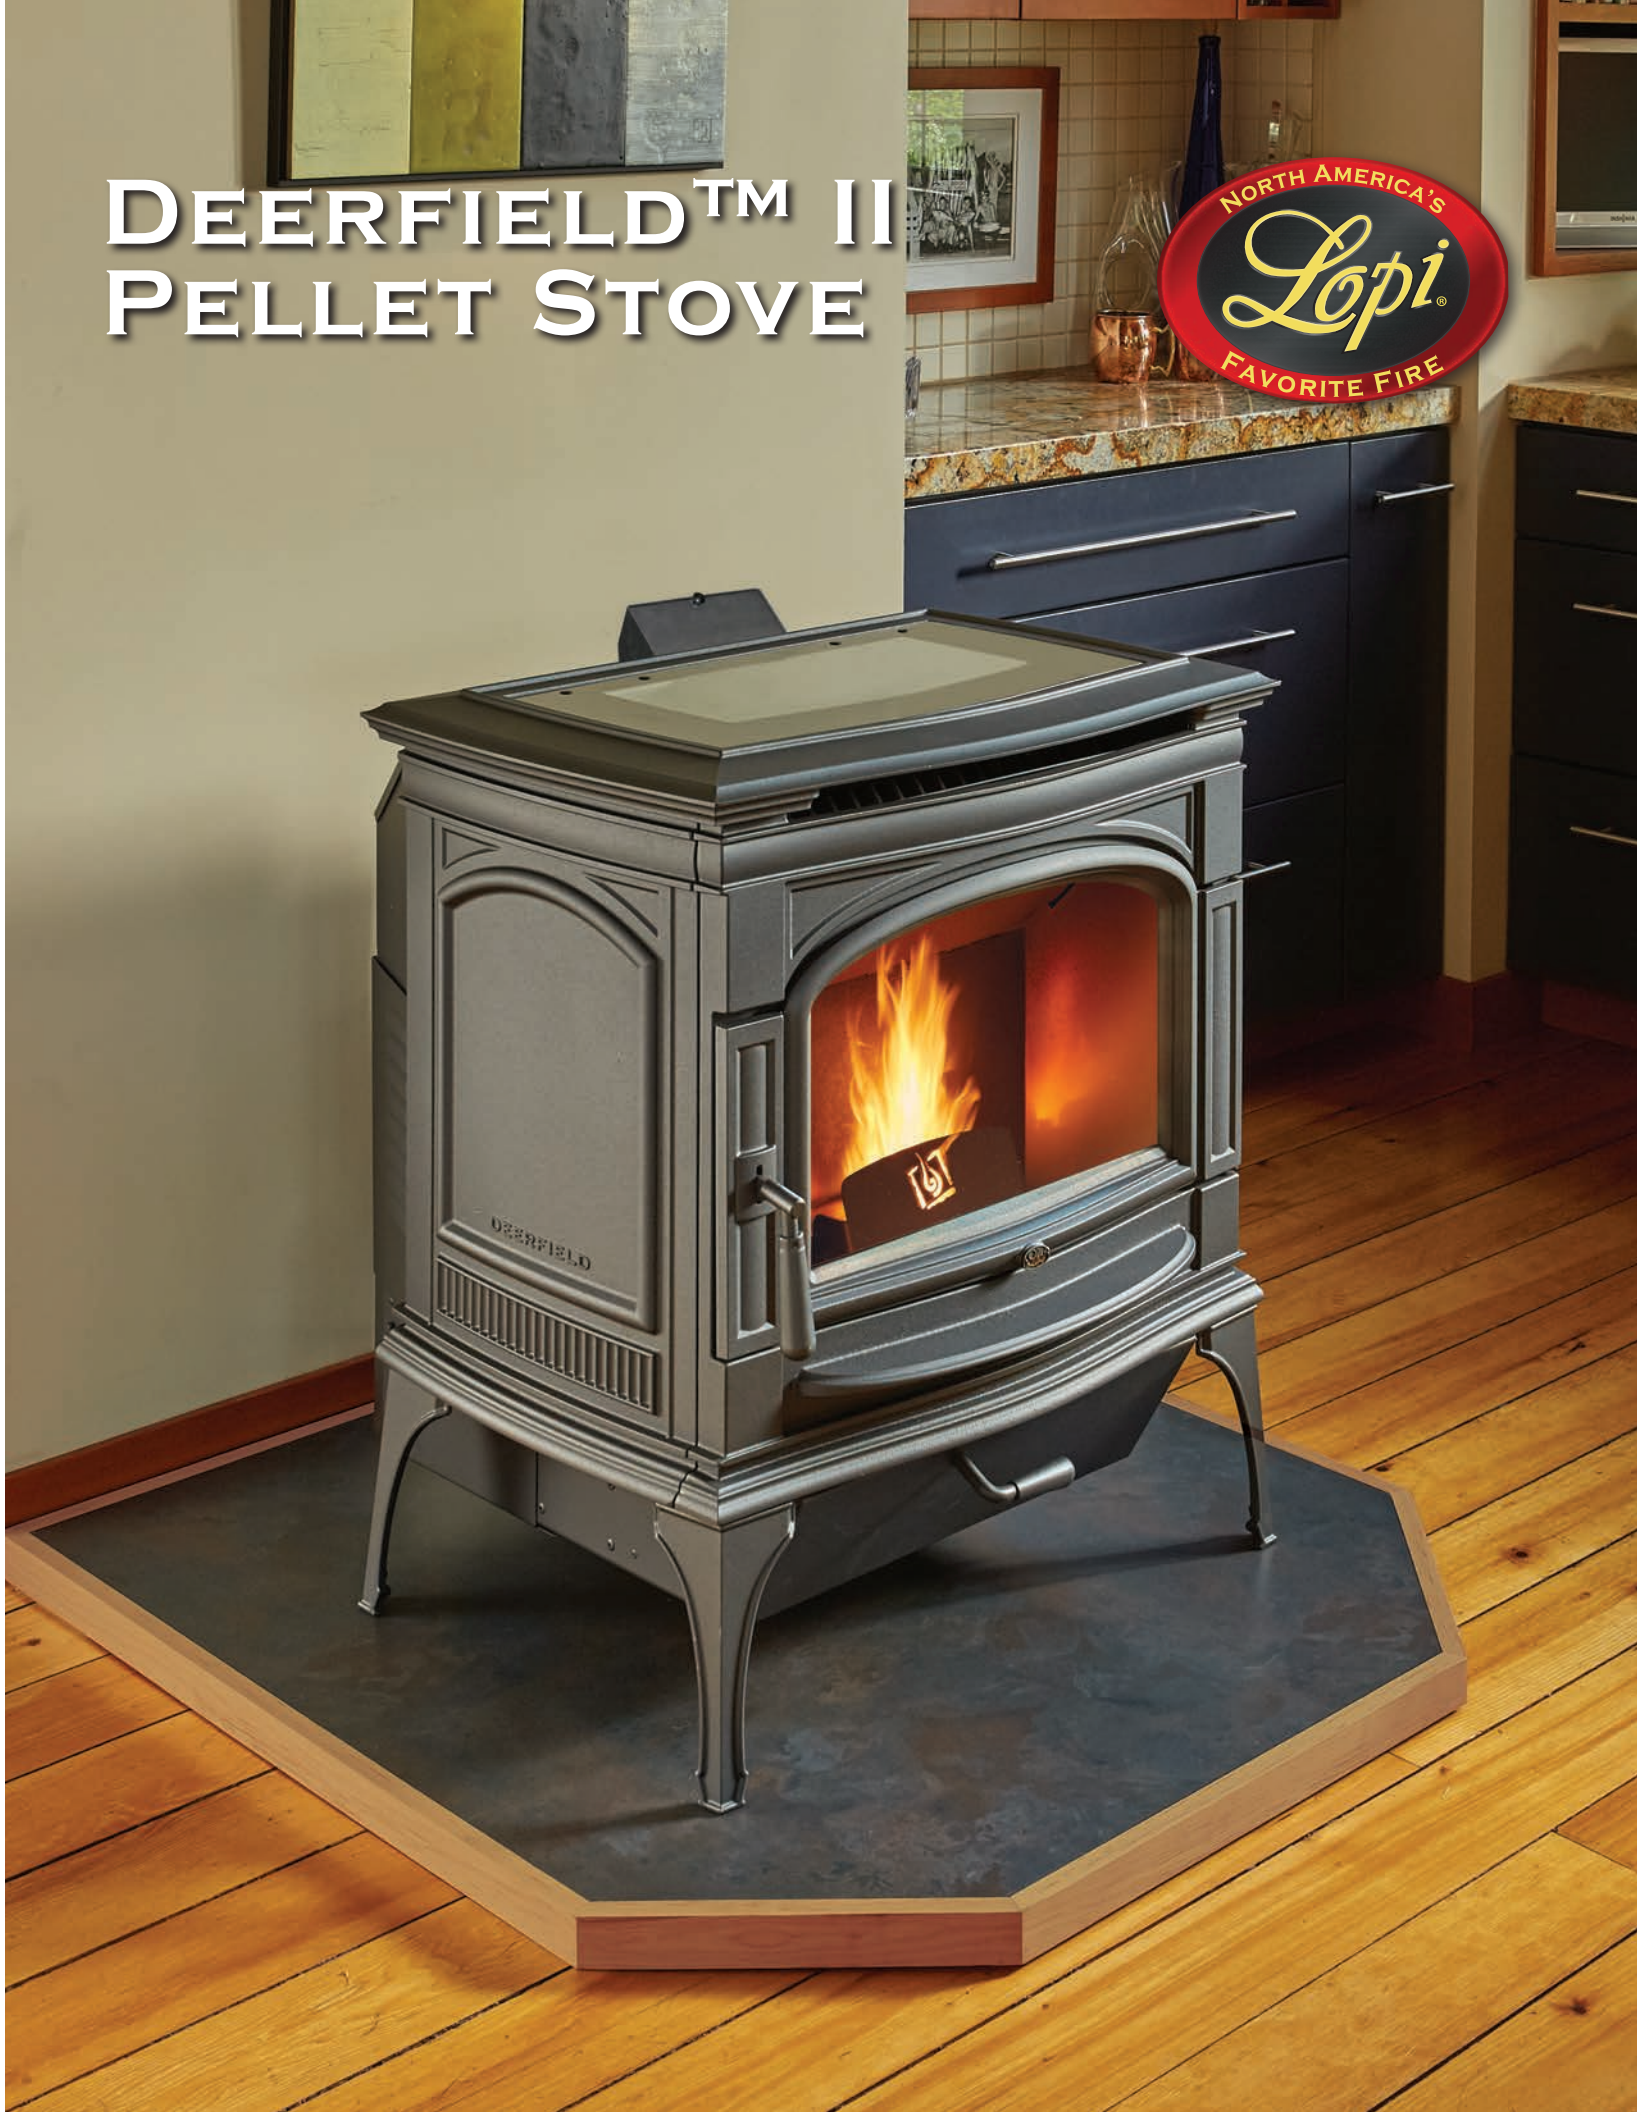


EASY TO OWN & OPERATE!

- 1. Large Capacity 60 lb. Hopper
- 2. Horizontal Rotary Disc (HRD): The HRD™ feed system prevents over feeding, blockage and makes for hassle-free operation. See QR code below for video.
- 3. High Torque Drive Motors for HRD and Auger
- 4. Heavy-Duty 304 Grade Stainless Steel Burn Platform
- 5. Automatic Ignition System
- 6. Large Capacity Ash Pan
- 7. Quiet Ultra Iron 100 CFM Combustion Fan
- 8. Outside Combustion Air, 3" intake
- 9. Lower Airwash
- 10. Upper Air Wash
- 11. Black Mirrored Ceramic Glass
- 12. Stainless Steel Firebox Liners
- 13. 25 lb. Cast Iron Heat Exchanger for Maximum Convection Heat Transfer
- 14. 3" Exhaust Vent
- 15. Twin 90 CFM Convection Fans
- 16. Easy Operation Controls



PREMIUM PELLET STOVE

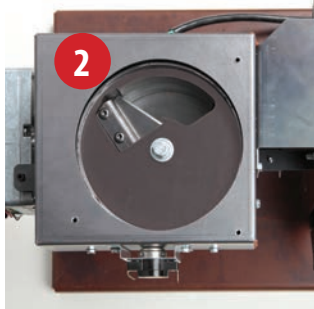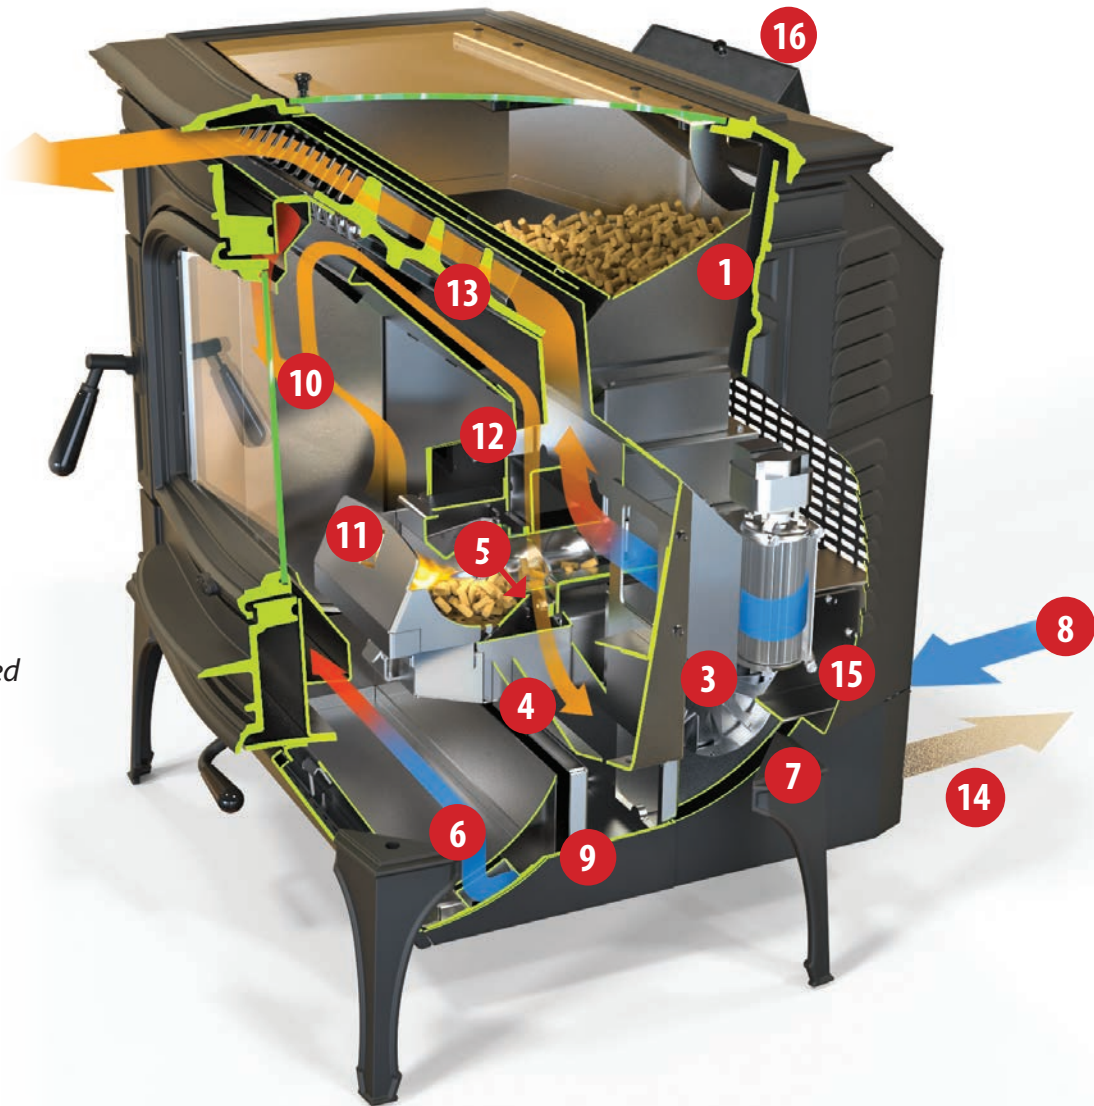

HRD Feed System



Watch a video on how the HRD works

DEERFIELD™ II Premium Medium Sized Cast Iron Pellet Stove

The Deerfield™ II combines beautifully proportioned castings with next generation technology, and optimum performance to bring you a revolutionary pellet stove that is both elegant and easy to live with. Graceful lines, a sleek glass fuel loading door and a large, mirrored ceramic glass viewing area offer a sophisticated look that will complement any home's décor.

Designed to burn all grades of wood pellet fuel, the Deerfield™ II features long burn times, up to 35 hours* and efficient heat output that is evenly distributed throughout your home. A 25 pound cast iron heat exchanger extracts maximum heat, when compared to traditional designs.

FEATURES

- Horizontal Rotary Disc Feed System

SPECIFICATIONS

- Heating Capacity*: Up to 2,500 square feet
- Emissions: 1.5 Grams Per Hour
- Hopper Capacity: 60 Lbs
- Maximum Burn Time: Up to 35 Hours
- Efficiency: Up to 80.1%
- EPA Tested BTU Range: 14,500 to 50,250
- Burn Rate: 1.7 to 6 Pounds Per Hour
- Venting: 3"
- Glass Viewing Area: Ceramic Glass, 16-3/4" W x 10-3/8" H, 165 Sq. In.

** Heating capacity may vary depending on degree of home insulation, floor plan and ambient temperature zone of the area you live.*

ADDITIONAL OPTIONS

- Outside Air Kit
- Thermostat Control


ELECTRICAL SPECIFICATIONS

Electrical Rating.....	115 Volts, 6 Amps, 60 Hz
Watts During Start-Up Sequence.....	480
Watts During Operation.....	300

TESTING

Listed Pelletized Solid Fuel Burning Appliance. Also for use in mobile homes. Certified for the US and Canada. Conforms to ASTM E2779-10 Room Heater Pellet Burning Type (UM) 84 HUD; Certified to ULC S627. Tested and listed for mobile homes in accordance with OAR 814-23-900 through 814-23-909. Tested and Listed by Omni.

Use the installation illustrations as a guide only. For complete installation instructions please refer to your Lopi Dealer or go to the Deerfield™ II product page at www.Lopistoves.com.
NOTE: Improper installation of your pellet appliance or failure to operate it in accordance to the guidelines detailed in the Owner's Manual may negate your warranty and endanger your home and family.

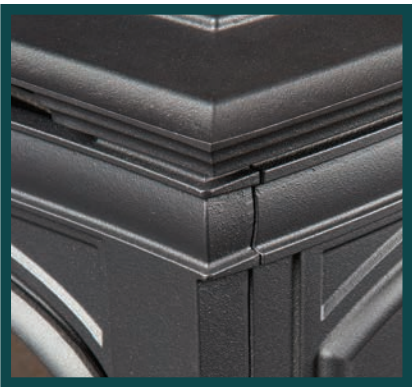

Beautifully Proportioned Cast Iron Design



Large Capacity Ash Pan



Easy Access Door for Cleaning Stove



Huge 60 lb. Hopper Capacity