

WOOD BURNING STOVES





NORTH AMERICA'S FAVORITE FIRE



1979 - Kurt Rumens & First Lopi Wood Stove

Lopi wood stoves have been North America's favorite choice in fire for over 40 years. Our reputation for solid craftsmanship, reliable performance, low emissions and unbeatable heating efficiency has been a winning combination year after year, and the favorite fire of families across the nation.

Lopi heating appliances are designed and hand-assembled at our state-of-the-art factory in Mukilteo, Washington. Each stove comes with our seven year warranty. After all, we have the experience and confidence to stand behind every single product we make, so we put it in writing.

We've learned and grown with every unit we've built over the years, but some things that haven't changed are the beauty of our stoves, performance you can trust, and our commitment to your satisfaction.

Whether you are new to the family of Lopi heating appliances or already a part of our family, we invite you take a look at our line of wood stoves. We know you'll find your favorite fire.



Lopi is not so much a brand name as it is a tradition of craftsmanship in the construction of our wood stoves and of pride to the families who own them. We invite you to share this proud tradition.

KURT W. F. RUMENS
President, Travis Industries



DARE TO COMPARE!

We build the finest wood burning stoves on the planet.

No other wood burning stove can surpass Lopi's performance or quality. It takes the best engineers and craftsmen to make the best products, and we've got them!

Your new Lopi stove features true unibody construction.

Using a 600-ton press to form and bend the metal, we eliminate unsightly welds and increase strength. Your stove also has a 6" heavy-duty, seamless steel flue collar and heavy gauge 3/16" to 1/2" steel construction. When you buy a Lopi, you're buying the finest. We guarantee it.

Cast iron door features a raised, pinched door seal and secure locking door handle that ensures an air-tight seal around the glass, so the door will never warp or flex. The frame also protects the glass gasket from direct contact with the fire.



Our single air control is easier to fine tune to your heating needs by regulating both primary and secondary air to the stove. The result is easy operation with optimum efficiency and control throughout the burn cycle.



Lopi uses real kiln-fired, refractory firebrick in the firebox. This is the same material used to line commercial boilers and furnaces, and is twice the weight of typical brick. The brick protects the steel while increasing the internal temperature within the firebox.



A large capacity ash drawer allows for quick and easy ash removal simply by sweeping ash from inside the stove down into the removeable ash drawer.

Not available on the Answer NexGen-Hybrid™ stove.



ANSWER NEXGEN-HYBRID™

The Answer NexGen-Hybrid™ is a beautiful small stove built with heavy-duty, high quality construction. This stove uses a five-sided convection chamber to distribute heat evenly throughout living spaces up to 1,400 square feet. The Answer NexGen-Hybrid™ has an elegant door design and huge viewing area, along with a 1.4 cubic foot firebox that can accommodate logs up to 18 inches long. All Lopi wood stoves feature a bypass damper which can be opened to draw smoke to the back of the firebox and exit the stove up the the chimney preventing smoke spillage into your home. This is used during the start-up and when reloading the stove.

Options

- 160 CFM Convection Fan
- Outside Air Kit
- **GREEN START™** Igniter (See page 16.


Specifications

Emissions:	1.4 Grams Per Hour
Heating Capacity:*	Up to 1,400 Square Feet
BTU Range Cord Wood:	12,500 - 60,000
BTU Range Crib Wood:	12,252 - 38,594
Maximum Burn Time:	Up to 10 Hours
Efficiency:**	80% HHV
Glass Viewing Area:	135 sq. in (15-1/4" W x 9-1/4" H)
Firebox Size:	1.4 Cubic Feet
Maximum Log Size:	18"
Bypass Damper:	Yes
Weight:	300 Pounds
Construction:	3/16" to 1/2" Steel Plate

* Heating capacity may vary depending on degree of home insulation, floor plan and ambient temperature zone of the area you live.

**As tested using B-415.1 using Crib Wood. HHV = High Heat Value

Clearances & Hearth Protection

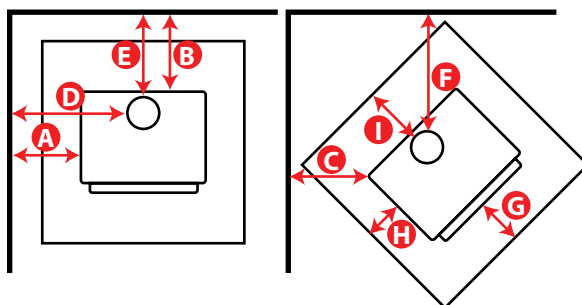

	Single Wall Connector	Double Wall Connector
A	18"	13"
B	16-1/2"	9"
C	10"	7-1/2"
D	27"	21-1/2"
E	19-1/2"	11-1/2"
F	19-1/2"	16-1/2"
	USA/CANADA	USA/CANADA
G	16" / 18"	16" / 18"
H	6" / 8"	6" / 8"
I	6" / 8"	6" / 8"



EVERGREEN NEXGEN-HYBRID™

The mid-sized Evergreen NexGen-Hybrid™ hits the mark on performance, function, and design. This stove presents sleek, clean lines and a timeless rectangular door design, with your choice of legs or a pedestal. It also features a large firebox that allows you to burn more wood for longer periods of time. NexGen-Hybrid™ Technology makes the Evergreen one of the most efficient and cost effective ways to heat your home, even if the power goes out! Alcove and Mobile Home approved. All Lopi wood stoves feature a bypass damper which can be opened to draw smoke to the back of the firebox and exit the stove up the chimney preventing smoke spillage into your home. This is used during the start-up and when reloading the stove.

Options

- Outside Air Kit
- 400 CFM Convection Fan
- **GREEN START™** Igniter (See page 16)

Specifications

Emissions:	1.2 Grams Per Hour
Heating Capacity*:	Up to 2,000 Square Feet
BTU Range Cord Wood:	12,500 to 70,500 BTUs Per Hour
BTU Range Crib Wood:	10,768 to 37,113 BTUs Per Hour
Maximum Burn Time:	Up to 14 Hours
Efficiency**:	77.3% HHV (High Heat Value)
Glass Area:	183 sq. in (16-7/8"W x 10-7/8"T)
Firebox Size:	2.18 Cubic Feet
Maximum Log Size:	20-1/2"
Bypass Damper:	Yes
Weight:	Legs: 505 lbs, Pedestal: 530 lbs
Construction:	3/16" to 1/2" Steel Plate


* Heating capacity may vary depending on degree of home insulation, floor plan and ambient temperature zone of the area you live.

**As tested using B-415.1 using Crib Wood. HHV = High Heat Value



Pedestal Model

Clearances & Hearth Protection

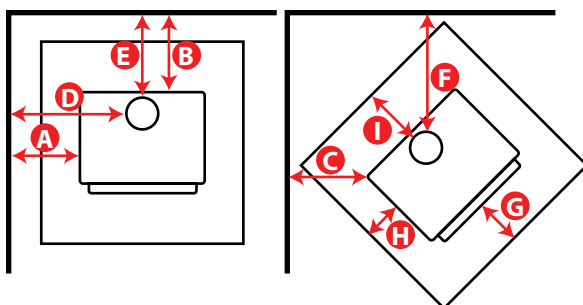

	Single Wall Connector	Double Wall Connector
A	12"	11"
B	19"	11"
C	11-5/8"	4"
D	22-1/2"	21"
E	21"	12-1/2"
F	21"	13-1/2"
	USA/CANADA	USA/CANADA
G	16" / 18"	16" / 18"
H	6" / 8"	6" / 8"
I	6" / 8"	6" / 8"



ENDEAVOR NEXGEN-HYBRID™

The Endeavor NexGen-Hybrid™ is a true 'best in class' stove because it combines form and function with an unbeatable heat transfer system. This stove is ideal for heating medium to large homes and is one of the cleanest burning mid-sized wood stoves available. The Endeavor NexGen-Hybrid™ features a 2.66 cubic foot firebox, along with an elegant door and large 165 square inch viewing area. The standard ash drawer allows for simple clean up. All Lopi wood stoves feature a bypass damper which can be opened to draw smoke to the back of the firebox and exit the stove up the chimney preventing smoke spillage into your home. This is used during the start-up and when reloading the stove. Alcove and Mobile Home approved.

Options

- 400 CFM Convection Fan
- Outside Air Kit
- **GREEN START™** Igniter (See page 16)


Specifications

Emissions:	1.2 Grams Per Hour
Heating Capacity:*	Up to 2,000 Square Feet
BTU Range Cord Wood:	15,500 - 70,500
BTU Range Crib Wood:	10,252 - 31,922
Maximum Burn Time:	Up to 16 Hours
Efficiency:**	80% HHV
Glass Area:	165 sq. in (15-1/4"W x 11-1/4"T)
Firebox Size:	2.66 Cubic Feet
Maximum Log Size:	19.5"
Bypass Damper:	Yes
Weight:	448 Pounds
Construction:	5/16" to 3/16" Steel Plate

* Heating capacity may vary depending on degree of home insulation, floor plan and ambient temperature zone of the area you live.

**As tested using B-415.1 using Crib Wood. HHV = High Heat Value

Clearances & Hearth Protection

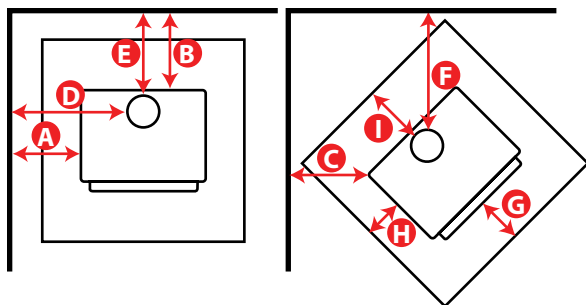

	Single Wall Connector	Double Wall Connector
A	15"	13"
B	17"	9"
C	15"	6-1/2"
D	24"	21-1/2"
E	19-3/4"	11-1/4"
F	24"	15"
	USA/CANADA	USA/CANADA
G	16" / 18"	16" / 18"
H	6" / 8"	6" / 8"
I	6" / 8"	6" / 8"



LIBERTY NEXGEN-HYBRID™

The Liberty NexGen-Hybrid™ is a big stove made for heating large homes and living spaces. At less than 1 gram of emissions per hour, it is one of the cleanest burning large stoves approved by the EPA. The huge firebox and fire viewing area allow you to load wood up to 24" long and fully appreciate the splendor of the fire. It also features a single control to adjust air flow, making it easy to achieve burn times up to 18 hours. The Liberty's step-top design is enchanting yet functional, providing cooking and warming surfaces as well as radiant and convective heat. All Lopi wood stoves feature a bypass damper which can be opened to draw smoke to the back of the firebox and exit the stove up the chimney preventing smoke spillage into your home. This is used during the start-up and when reloading the stove. Alcove and Mobile Home approved.

Options

- 400 CFM Convection Fan
- Outside Air Kit
- **GREEN START™** Igniter (See page 16)


Specifications

Emissions:	0.9 Grams Per Hour
Heating Capacity:*	Up to 2,500 Square Feet
BTU Range Cord Wood:	15,000 - 78,200
BTU Range Crib Wood:	11,598 - 47,138
Maximum Burn Time:	Up to 18 Hours
Efficiency:**	80% HHV
Glass Area:	232 sq. in (21-1/4" W x 11-3/4" T)
Firebox Size:	4.14 Cubic Feet
Maximum Log Size:	24"
Bypass Damper:	Yes
Weight:	570 Pounds
Construction:	3/16" to 1/2" Steel Plate

* Heating capacity may vary depending on degree of home insulation, floor plan and ambient temperature zone of the area you live.

**As tested using B-415.1 using Crib Wood. HHV = High Heat Value

Clearances & Hearth Protection

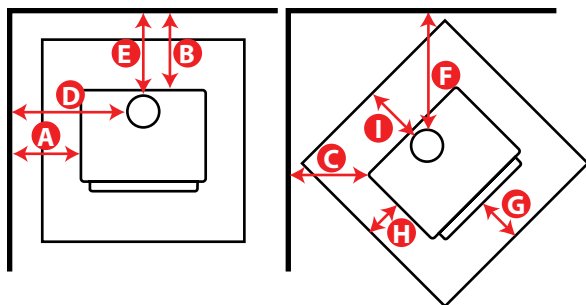

	Single Wall Connector	Double Wall Connector
A	16"	16"
B	15"	10"
C	9-1/2"	7-1/2"
D	28"	27-1/2"
E	18-1/4"	12-3/4"
F	21"	18-1/2"
	USA/CANADA	USA/CANADA
G	16" / 18"	16" / 18"
H	6" / 8"	6" / 8"
I	6" / 8"	6" / 8"

ROCKPORT NEXGEN-HYBRID™

The Rockport NexGen-Hybrid™ combines beautiful European castings with optimum performance and solid construction to bring you the perfect mid-sized wood stove. Premium materials like iron, steel, real masonry brick and crystal clear ceramic glass are brought together in a fusion of classic elegance and durability, designed to keep your family warm for years to come, even when the power goes out. All Lopi wood stoves feature a bypass damper which can be opened to draw smoke to the back of the firebox and exit the stove up the the chimney preventing smoke spillage into your home. This is used during the start-up and when reloading the stove. Alcove and Mobile Home approved.

Options

- 400 CFM Convection Fan
- **GREEN START™** Igniter (See page 16)


Specifications

Emissions:	.73 Grams Per Hour
Heating Capacity:*	Up to 2,000 Square Feet
BTU Range Cord Wood:	13,500 to 65,500
BTU Range Crib Wood:	12,594 - 42,722
Maximum Burn Time:	Up to 14 Hours
Efficiency:**	80% HHV
Glass Area:	165 sq. in (16-3/4"W x 10-3/8"T)
Firebox Size:	2.04 Cubic Feet
Maximum Log Size:	20"
Bypass Damper:	Yes
Weight:	450 Pounds
Construction:	Cast Iron/Steel

* Heating capacity may vary depending on degree of home insulation, floor plan and ambient temperature zone of the area you live.

**As tested using B-415.1 using Crib Wood. HHV = High Heat Value

Clearances & Hearth Protection

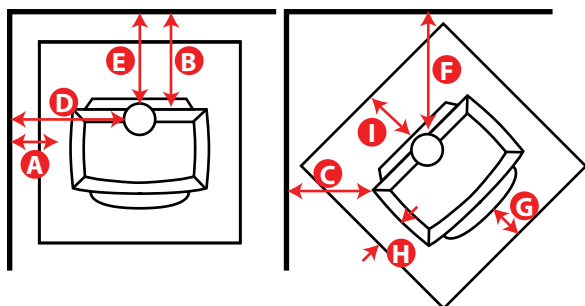

	Single Wall Connector	Double Wall Connector
A	16"	16"
B	16"	10-1/2"
C	9"	9"
D	27-1/8"	26-1/2"
E	18-1/4"	12-1/4"
F	19-1/4"	18-3/4"
	USA/CANADA	USA/CANADA
G	16" / 18"	16" / 18"
H	6" / 8"	6" / 8"
I	6" / 8"	6" / 8"







NEXGEN-HYBRID™ WOOD HEATING IS GOOD!



Longer Burn Times = Less Trips To The Wood Pile!

With NexGen-Hybrid™ Technology, you'll enjoy 20-60% longer burn times, meaning you'll conserve more wood, make fewer trips to the woodpile, and save more money while keeping your family warm.

Lowest Emissions = Clean Air

NexGen-Hybrid™ Technology reduces emissions by up to 50%, helping to keep our air and environment cleaner and gives you the peace of mind that you are getting the most from a renewable fuel.



ADVANCED NEXGEN-HYBRID™ TECHNOLOGY

Delivering clean and efficient EPA certified wood heating solutions


NexGen-Hybrid™ Technology, three stages of combustion

Stage 1: Occurs when the wood is burning and heat from the fire causes the wood to release gases and smoke.

Stage 2: Preheated air is introduced into the fire, which ignites the gases and smoke. This produces more heat and reduces emissions.

Stage 3: Remaining gases and smoke enter an advanced combustor above the baffle plate where they are reignited, producing even more heat and reducing emissions even further and getting you the best result for your home heating.

The result of this three-stage combustion process is cleaner, longer burns, higher efficiencies, and more heat into your home. This makes NexGen-Hybrid™ wood appliances some of the most efficient and cost effective ways to heat your home, even when the power is out.

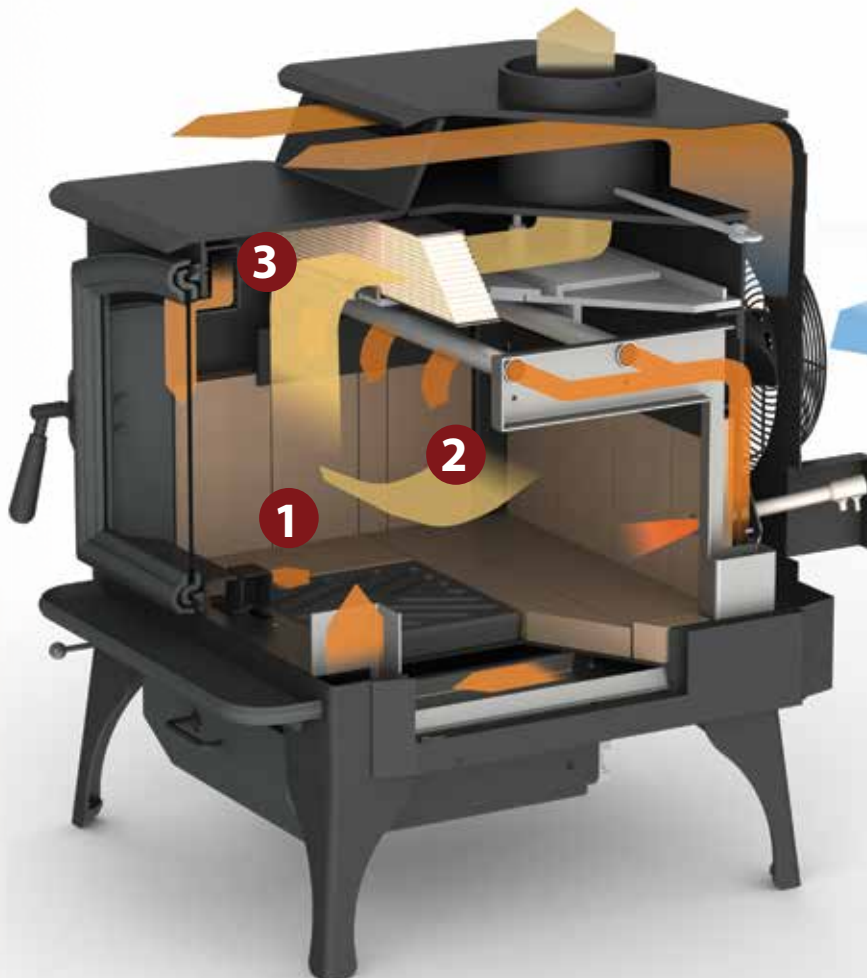

*Our optional 400
CFM fan is available
on all models
except the Answer
Wood Stove*

GREEN START™

PUSH BUTTON START UP, THE GREATEST WOOD STOVE OPTION EVER!

Starting your wood stove has never been easier. Much like Charles Kettering's invention of the electric automobile ignition 100 years ago, the GreenStart igniter system has evolved the ignition of fire in a spectacular way and has become the greatest innovation in wood heating in over 100 years.



1 Simply load your wood into the firebox, close the door, and push the GreenStart™ button to begin!



2 A compressor will force 1,400 degree preheated air into the firebox directly onto the wood, giving a clean, fast, smoke-free start up within 30 seconds.



3 The igniter will then turn off and a compressor will continue to push air, acting as a bellows to fan the fire.



4 The compressor will fan the fire at various speeds to deliver proper draft and greatly accelerate the startup time.

**THE GREENSTART® IGNITER IS AN
OPTIONAL FEATURE WITH ALL LOPI®
STOVE MODELS IN THIS BROCHURE.**

See your authorized Lopi dealer and ask for an instore demonstration or scan the QR code below.



5 After 15 minutes the compressor will shut off and you will have a beautiful, roaring fire. The fire can be maintained over time by adjusting the air control.

7-YEAR “REAL WORLD” WARRANTY

Our 7-Year Warranty offers more protection on key components than the so-called “Limited Lifetime” warranties of our competitors. Lopi builds stoves to last a lifetime.

We’ll stand behind the quality and performance of our products year after year because that’s the way we do business - and you don’t have to read the fine print for your peace of mind.

YEARS 1-2:

All parts and labor on your wood burning appliance, including blower and one-way freight allowance.



YEARS 3-5:

All parts and labor on the firebox, door assembly, air control assemblies and one-way freight allowance.

YEARS 6-7: Parts only on firebox, door and air control assemblies.

LOPI® DESIGN MY FIRE. BE YOUR OWN DESIGNER.

With our New & Enhanced online Design My Fire feature

Pick your stove, accessories, and extras then snap a photo of your room and upload it to see what your new fire will look like in your room! Visit our website at **WWW.LOPISTOVES.COM**.



FREE MOISTURE METER

Testing the moisture level in your wood is a crucial, yet often ignored step when burning a fire. Wet wood creates excessive smoke and moisture in the firebox, whereas dry wood allows for a hotter, more efficient burn. Lopi includes a FREE moisture meter with your wood stove so you can ensure that you’re burning dry wood and getting the highest performance out of your stove.





For installation specifications
refer to the Owner's Manuals
found on the Lopi® website
www.lopistoves.com



**ANSWER
NEXGEN-HYBRID™**



**EVERGREEN
NEXGEN-HYBRID™**



**ENDEAVOR
NEXGEN-HYBRID™**

www.lopistoves.com	SMALL		MEDIUM		MEDIUM	
SPECIFICATIONS						
Width	23-5/8"		28"		24"	
Height (All Legs)	27-7/8"		31"		32"	
Height (Pedestal)	N/A		33-1/2"		N/A	
Depth	16-1/4"		20-1/4"		23-1/2"	
Flue Size	6"		6"		6"	
Construction	3/16" to 1/2" Steel		1/4" to 1/2" Steel		3/16" to 5/16" Steel	
Weight (body w/legs)	300 lbs.		505 lbs w/Legs, 530 lbs w/Pedestal		448 lbs.	
Ash Pan	No		Yes		Yes	
PERFORMANCE						
Emissions	1.4 Grams/Hr.		1.2 Grams/Hr.		1.2 Grams/Hr.	
Heating Capacity (Sq Ft.)	Up to 1,400		Up to 2,000		Up to 2,000	
BTU Range Cord Wood*	12,500 - 60,000		12,500 to 70,500		15,500 - 70,500	
BTU Range Crib Wood*	12,252 - 38,594		10,768 to 37,113		10,252 - 31,922	
Overall Efficiency**	Up to 80% HHV		Up to 77.3% HHV		Up To 80% HHV	
Maximum Burn Time	Up To 10 Hours		Up To 14 Hours		Up To 16 Hours	
Firebox Size	1.4 Cubic Ft.		2.18 Cubic Ft.		2.66 Cubic Ft.	
Maximum Log Size	Up To 18"		Up To 20-1/2"		Up To 19.5"	
CLEARANCES	Single Wall Connector	Double Wall Connector	Single Wall Connector	Double Wall Connector	Single Wall Connector	Double Wall Connector
A = Stove to Side Wall	18"	13"	12"	11"	15"	13"
B = Stove to Back Wall	16-1/2"	9"	19"	11"	17"	9"
C = Stove to Corner Wall	10"	7-1/2"	11-5/8"	4"	15"	6-1/2"
D = Connector to Side Wall	27"	21-1/2"	22-1/2"	21"	24"	21-1/2"
E= Connector to Back Wall	19-1/2"	11-1/2"	21"	12-1/2"	19-3/4"	11-1/4"
F= Connector to Corner Wall	19-1/2"	16-1/2"	21"	13-1/2"	24"	15"
HEARTH PROTECTION	USA	CANADA	USA	CANADA	USA	CANADA
G = Front	16"	18"	16"	18"	16"	18"
H = Sides	6"	8"	6"	8"	6"	8"
I = Back	6"	8"	6"	8"	6"	8"
ALCOVE	Combustible	Non Combustible	Combustible	Non Combustible	Combustible	Non Combustible
J = Minimum Width	49-5/8"	35-5/8"	50"	40"	50"	36"
K = Maximum Depth	48"	48"	48"	48"	48"	48"
L = Minimum Height	84"	6" above top	84"	6" above top	84"	6" above top

* EPA tests to determine BTU output are achieved with a single load of wood at each burn rate. At home, you are likely to add more wood to your stove to maintain your desired comfort level. By the simple process of loading your stove with additional wood, you could achieve up to a 20% higher heat output than established during EPA testing.


** Overall Efficiency as tested using B-415.1 using Crib Wood. OHV = Overall Heat Value.

CLEARANCES TO UNPROTECTED COMBUSTIBLES


Use these illustrations in conjunction with the information under the "Clearance" & "Alcove" headings above.

Heating Capacity may vary depending on degree of home insulation, floor plan and ambient temperature zone of the area in which you live.


STRAIGHT WALL



INSTALLATIONS CORNER WALL



ALCOVE



ALL MODELS ARE EPA CERTIFIED.

For installation specifications refer to the Owner's Manuals found on the Lopi® website www.lopistoves.com



**LIBERTY
NEXGEN-HYBRID™**



**ROCKPORT
NEXGEN-HYBRID™**

	LARGE		MEDIUM	
SPECIFICATIONS				
Width	30"		28-1/4"	
Height (All Legs)	34-3/16"		31-1/2"	
Height (Pedestal)	N/A		N/A	
Depth	24-9/16"		19-3/4" (21-3/4" w/heat shield)	
Flue Size	6"		6"	
Construction	5/16" to 1/2" Steel		5/16" to 1/2" Steel, Cast Iron	
Weight (body w/legs)	570 lbs.		Cast Iron - 450 lbs.	
Ash Pan	Yes		Yes	
PERFORMANCE				
Emissions	0.9 Grams/Hr.		.73 Grams/Hr.	
Heating Capacity (Sq Ft.)	Up to 2,500		Up to 2,000	
BTU Range Cord Wood*	15,000 to 78,200		13,500 to 65,500	
BTU Range Crib Wood *	11,598 to 47,138		12,594 to 42,722	
Overall Efficiency **	Up To 80% HHV		Up To 80% HHV	
Maximum Burn Time	Up To 18 Hours		Up To 14 Hours	
Firebox Size	4.14 Cubic Ft.		2.04 Cubic Ft.	
Maximum Log Size	Up To 24"		Up To 20"	
CLEARANCES	Single Wall Connector	Double Wall Connector	Single Wall Connector	Double Wall Connector
A = Stove to Side Wall	16"	16"	16"	16"
B = Stove to Back Wall	15"	10"	16"	10.5"
C = Stove to Corner Wall	9-1/2"	7-1/2"	9"	9"
D = Connector to Side Wall	28"	27-1/2"	27-1/8"	26-1/2"
E = Connector to Back Wall	18-1/4"	12-3/4"	18-1/4"	12-1/4"
F = Connector to Corner Wall	21"	18-1/2"	19-1/4"	18-3/4"
HEARTH PROTECTION	USA	CANADA	USA	CANADA
G = Front	16"	18"	16"	18"
H = Sides	6"	8"	6"	8"
I = Back	6"	8"	6"	8"
ALCOVE	Combustible	Non Combustible	Combustible	Non Combustible
J = Minimum Width	62"	42"	60-1/4"	40-1/4"
K = Maximum Depth	48"	48"	48"	48"
L = Minimum Height	84"	6" above top	84"	6" above top

*EPA tests to determine BTU output are achieved with a single load of wood at each burn rate. At home, you are likely to add more wood to your stove to maintain your desired comfort level. By the simple process of loading your stove with additional wood, you could achieve up to a 20% higher heat output than established during EPA testing.

** Overall Efficiency as tested using B-415.1 using Crib Wood. OHV = Overall Heat Value.

Travis Wood Burning Fireplaces, Inserts and Stoves are protected by one or more of the following patents; U.S. 9,170,025, 4,665,889 as well as other U.S. and Foreign Patents pending.

Only the most professional specialty hearth retailers are selected to sell Lopi® stoves and inserts. They represent our total commitment to exceptional products and excellent service. In addition, they have successfully completed special training programs in the proper selection, installation, and service of all Lopi® products.

Your professional Lopi hearth dealers are experts who can advise you on everything from customizing the color of your appliance to selecting appropriate venting and chimney materials. They can show you Lopi® models on display, including working models actually burning.

KEEP THEM WARM, KEEP THEM SAFE



Children, like most of us are fascinated by fire and for families with young children, fireplaces pose a potential safety hazard. Take the time to educate young children about the dangers of fire and the hot surface temperatures of glass and metal surrounding the wood burning appliance. If you have an infant or toddler consider installing a firescreen; make sure it's tall enough so that children can't climb over it, and that it's placed far enough away so that reaching arms can't touch the surfaces of the fireplace. A few precautions such as these will allow everyone in your home to safely enjoy the comfort and warmth of your new stove.



Lopi® produces a wide variety of quality wood, pellet, and gas hearth appliances.

Find your favorite fire today by visiting: www.lopistoves.com



YOUR LOPI AUTHORIZED DEALER:



www.lopistoves.com

Manufactured in
Mukilteo, WA

Lopi reserves the right to alter or improve its products at any time without notification. Photos shown are for illustrative purposes only. The colors shown in the brochure are as accurate as possible, however some natural materials may vary due to the nature of the products. All trademarks belong to Travis Industries. For installation specifications refer to the Owner's Manual found on the Lopi website. ©11/2025 Printed in U.S.A. - #98800729